





altro

Altro Maxis™ 25


Safety flooring

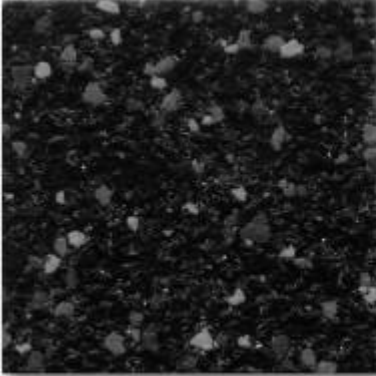

Galaxy MXI25219

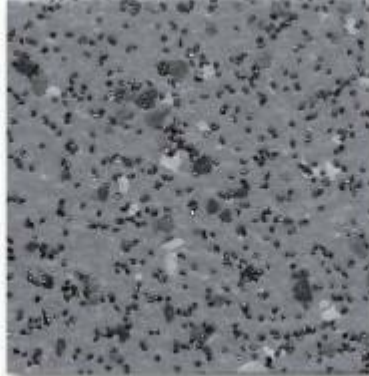

Universe MXI25209

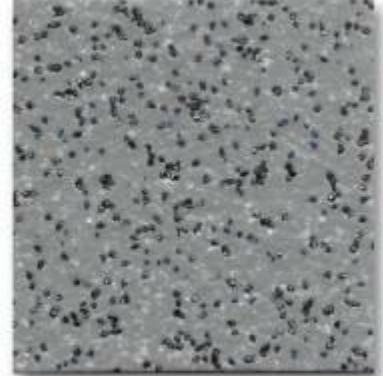


Summit MXD25206




Calibre MXD25201




Legend MXD25215

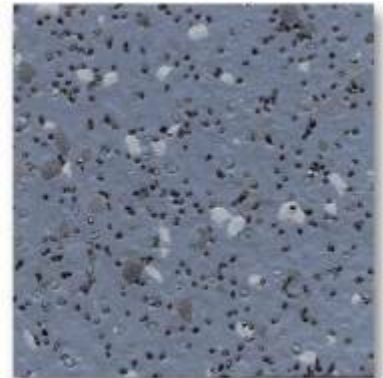


Vanquish MXI25211

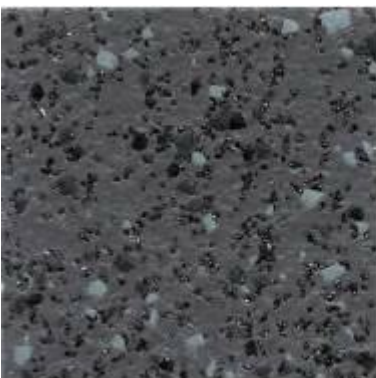

Fusion MXI25208

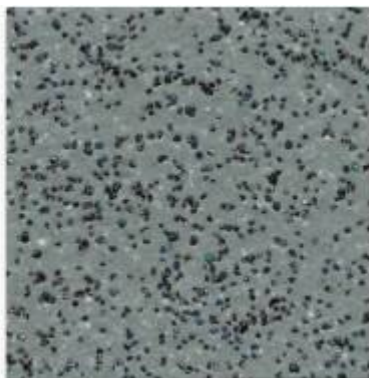

Pinnacle MXD25204

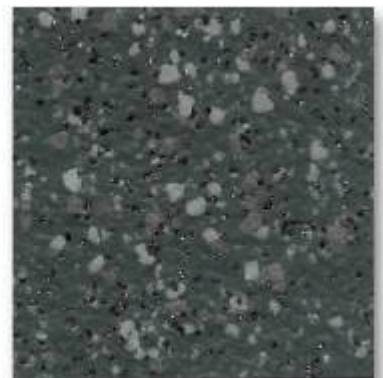

Valiant MXI25218


explore www.altro.com




Epic MXI25212



Sovereign MXD25214

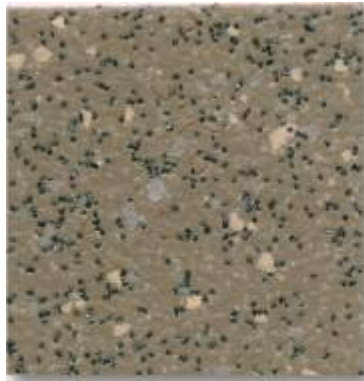


Meridian MXI25216

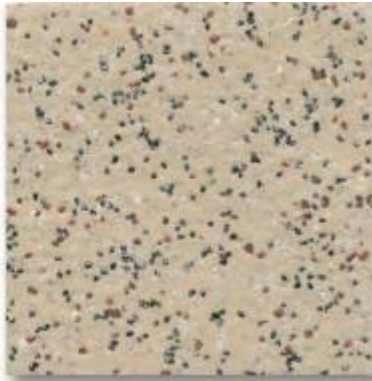

Merit MXD25207



Enterprise MXI25220

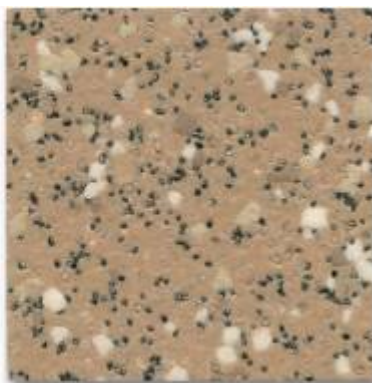

Endeavour MXI25210



- All Altro manufactured safety flooring contains post-consumer recycle as an integral raw material
- All Altro safety flooring is 100% recyclable
- Altro is the leader in safety flooring recycling
- Altro Maxis™ 25 contains at least 10% recycled content

Altro Maxis™ 25 Safety Flooring

Ease of cleaning and superior colour retention qualities make this product ideal for: public circulation areas, school corridors, hospital streets, classrooms, shops and supermarkets.

NSW Government Contract Approved Product

Specification

Total thickness:	2.5m	EN428
Roll length:	20mm	EN426
Roll width:	2.0m	EN426
Weight:	3.1kg/m ²	EN430

Construction

Altro unique construction.

Performance

Indentation	<0.1mm	(EN433)
Dimensional stability	<0.4%	(EN434)
Flexibility	PASS 20mm Mandrel	(EN435)
Colour fastness	>6	(EN 20105 B02)
Fire performance	Class 1	BS476: Part 7
	Pass	(EN ISO 11925-2)
	>8kW/m ²	(EN ISO 9239-1)
	Class Bfl s1	(EN13501-1)
	Pass	(EN425)
Abrasion/wear resistance		
Classification	Classes 34/43	(EN685)
	Homogeneous	
Sound absorption	8dB	(ISO 140-8)

Cleaning Performance

Extensive independent cleaning trials and colour retention tests have proved that Altro Easyclean Maxis Technology demonstrates superior performance to all other, 'easy maintenance' safety flooring products. Please feel free to contact Altro for further details of these tests.

Warranties

Warranty 12 years
(subject to conditions on warranty form).

Life expectancy 20 years
(under many traffic conditions, wear is comparable to epoxy and quarry tiles).

Slip resistance

Provides good wet and dry static and dynamic slip resistance under eg: TRRL Pendulum, ASTM D 2047, DIN 51130 R11 Test conditions. Complies with AS/NZS 4586:1999 HB 197 Class W. Retains slip resistance throughout its entire life due to its unique construction.*

Wear resistance

Tests performed in accordance with EN13845 classified Altro Maxis as Class 34 (very heavy commercial use) and Class 43 (heavy industrial use).

Chemical resistance

Excellent resistance to chemicals and staining. A copy of the Altro Guide to Chemical Resistance is available from ASF Technical Services.

Chemical spillages should always be removed immediately to protect the floor. For areas liable to chemical spillages, please consult Altro for Technical advice.

Protection

Chairs and stools should be fitted with quality plastic protective feet to avoid damage. For further information please contact Altro.

Recommended Cleaning Methods

Over the years, technical advances to Altro safety floors have significantly improved their cleaning characteristics. And now, the development of Altro Easyclean Maxis™ Technology means that in many conditions, only mop cleaning is required. When mopping or hand scrubbing, use Altroclean 44™. For comprehensive advice on cleaning techniques and chemicals, refer to Altro safety flooring routine maintenance instructions on www.asf.com.au

Installation and Maintenance

Altro flooring must be laid in accordance with AS 1884-1985 in conjunction with the Altro Installation and Maintenance Guide (Australian edition), which is available from ASF or on our web-site at www.asf.com.au

All joints must be correctly hot-welded. Where applicable, the sub-floor must incorporate an effective DPM. Use the recommended Altro adhesive or equivalent.

Failure to install and maintain Altro flooring in accordance with the recommended procedure can effect performance and may jeopardise warranties.

Altro safety flooring is not recommended for areas where lighted cigarette ends are likely to be left or trodden into the floor, where solvents (such as acetone) are in regular use or where organic dyes or floor cleaners containing pine oil are used. Some materials are known to cause staining, typical examples of these are, rubber tyres, rubber mats, asphalt and bitumen materials, etc.

If you have any concern about possible staining risks, consult with Altro APAC and/or obtain a copy of the 'Altro Chemical Resistance Guide' which is available free of charge.

Contains ALTROSAN, a lifelong integral biocide that inhibits the growth of bacteria including MRSA and VRE.

The original vinyl safety flooring of Altro construction for lifelong slip resistance, wear resistance and bacteriostatic resistance.

For typical applications see our technical literature. The only 'all the way through' safety floorings,

Sales and stock enquiries

1800 673 441

Technical service enquiries

1800 300 120

*For wet areas where bare foot slip resistance is required such as shower and drying off areas, swimming pool and whirlpool surrounds and their changing rooms we recommend the use of Altro T20.



Altro safety flooring is endorsed by HACCP Australia Pty. Ltd., as flooring suitable for use in food processing and food handling environments for businesses operating a HACCP based food safety programme.



nuplex
Construction Products

www.nuplexconstruction.co.nz
Freephone 0508-882 288

