

Solarshield™

Textured aluminium sheet combined with a self-adhesive rubber/bitumen compound suitable for exposed flashings and flat deck roof membranes.

Description

Solarshield™ is a robust, cold applied, self-adhesive, heavily textured aluminium membrane which can be used as a conformable solar reflective flashing or protection for exposed roofing membranes.

When Solarshield is used as a flashing, it should be pre-measured to size before applying to ensure that it is terminated into a primed chase or securely fastened by a cover strip to prevent moisture by-passing the waterproofing. A hot climate grade (HC) is available to suit higher ambient temperatures.

Advantages


Features	Advantages
Aluminum sheet	<ul style="list-style-type: none"> Provides attractive, solar reflective surface
High purity aluminium	<ul style="list-style-type: none"> Provides effective external protection against aggressive environments and ozone attack
No naked flame system	<ul style="list-style-type: none"> No flame hazard
Self-adhesive rubberised asphalt	<ul style="list-style-type: none"> Continuity ensured at overlaps Unique thick rubber/bitumen formulation allows healing of small puncture Provides excellent adhesion to substrate layer
Heavily embossed surface	<ul style="list-style-type: none"> Allows membrane to accommodate transverse and longitudinal movement without rupturing
Compatibility	<ul style="list-style-type: none"> Suitable for use with all Grace self-adhesive membrane systems
Easily worked	<ul style="list-style-type: none"> Highly conformable, can be cut and bent to shape on site Simple, reliable, low labour cost with the benefit of site-programmed installation

Applications

Solarshield comprises a thick aluminium sheet which is heavily embossed to accommodate both transverse and longitudinal movement. A thick, self-adhesive rubber/bitumen compound is laminated to the underside to provide adhesion to primed substrates and all Grace membranes.

It is supplied to sites in rolls 1m wide x 10m long, 1.5mm thick overall and is normally unrolled and cut to size before applying sticky side down on to primed concrete or membrane surfaces to which it bonds firmly.

Continuity is achieved by overlapping 75mm on sides and ends and well rolling the joint to promote bonding.

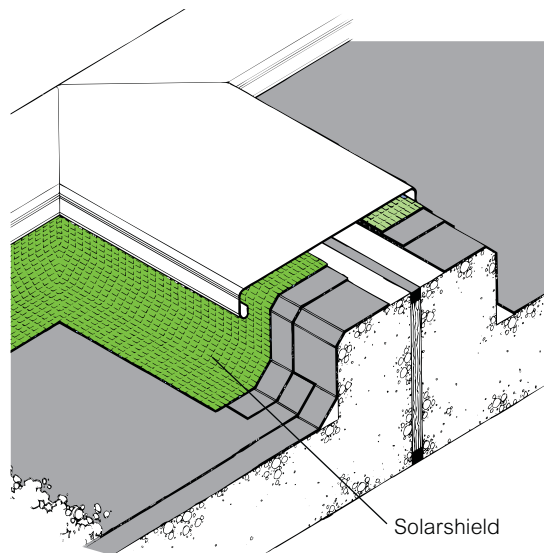


Installation

The installation of the Solarshield should not be carried out at temperatures below -5°C. At air temperatures below 4°C measures should be taken to ensure that all surfaces are free from ice, frost or condensation.

The underlying roof waterproofing membrane must be clean and surface dry before applying the self-adhesive Solarshield. When used as a flashing pre-measure the extent of the Solarshield to accurately follow the roof profile to the termination chase, or mark-out the free board height if metal counter flashings are used to securely fasten the leading edges.

Pre-bending or shaping the Solarshield to the correct profile before removing the silicone paper will assist with the application.

Solarshield should be laid by peeling back the protective silicone release paper and carefully offering the adhesive face into position on the prepared surface. Cut and trim carefully around internal and external corners to form

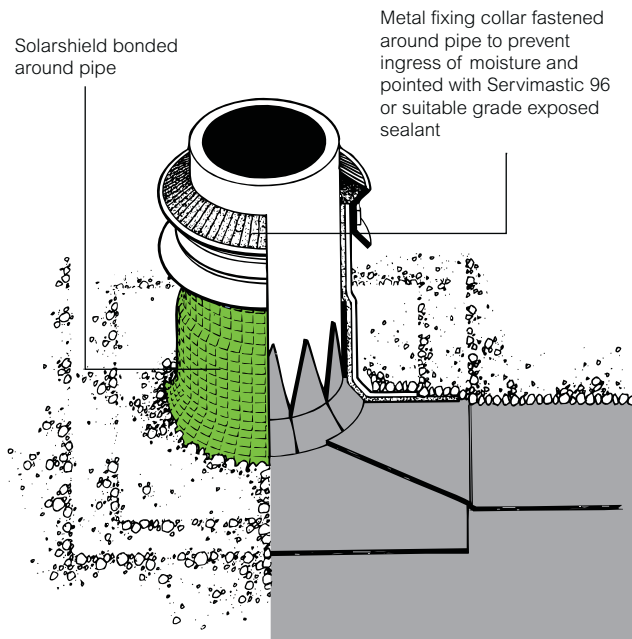

Typical Pipe Detail

Supply

Pack size	1m x 10m roll
Gross weight	22kg
Storage	Dry conditions below +30°C

an effective protection flashing to the waterproofing membrane beneath. The material should be brushed on to the surface to ensure good initial bond. Adjacent widths should be aligned and overlapped 75mm minimum at side and ends, and well rolled with a firm pressure using a Bituthene Lap Roller to ensure complete adhesion and continuity between the layers. Laps should be staggered between layers to prevent a build-up of layers. In cold weather conditions the application of warmth will aid adhesion.

Health and Safety

Refer to relevant Material Health and Safety data sheets.

Specification

Solarshield, preformed, self-adhesive, aluminium solar reflective flashing membrane shall be laid and terminated as shown on the working drawings with well rolled 75mm overlaps, laid strictly in accordance with the manufacturer's instructions and supplied by Grace Construction Products. For further information, contact your local Grace representative.

Grace Technical Services

For assistance with working drawings for projects and additional technical advice, please contact Grace Technical Services.

www.graceconstruction.com

**Australia: Brisbane (61-7) 3277 7244 Hong Kong (852) 2675 7898 Japan (81-3) 5405 2991
Korea (82-32) 814 2051 Mainland China: Beijing (86-10) 6786 3488, Guangzhou (86-20) 3833 0775,
Shanghai (86-21) 5467 4678 Singapore (65) 6265 3033 Taiwan (886-3) 461 5461 Thailand (66-2) 709 4470**

Solarshield is a trademark of W. R. Grace & Co.-Conn.

The information given is based on data and knowledge considered to be true and accurate and is offered for the user's consideration, investigation and verification. Since the conditions of use are beyond our control we do not warrant the results to be obtained. Please read all statements, recommendations or suggestions in conjunction with our conditions of sale including those limiting warranties and remedies which apply to all goods supplied by us. No statement, recommendation or suggestion is intended for any use which would violate or infringe statutory obligations or any rights belonging to a third party.

These products may be covered by patents or patents pending. Copyright 2007. W. R. Grace (S) Pte Ltd 110-SOL-4 Printed in Singapore 04/07

GRACE