

**NUPLEX****BUILDING PRODUCTS**

WHISPER

CEILING FINISH

PURPOSE:

- A textured finish for commercial and domestic ceilings. Whisper reduces noise levels and retards the spread of fire. Its subdued or glitter surface enhances the appearance of a room.

PROPERTIES:

- Available in **WHITE** or **STANDARD** Whisper, in fine or coarse texture.

WHITE WHISPER

- An asbestos free cellulosic bound texturing compound containing mineral fillers and shredded polystyrene.
- Modern, attractive, bright white finish.
- Tinting to a limited range of colours using powders or liquid paint stainers is possible.
- Available with glitter.
- Contains fungicide to retard mould growth.


STANDARD WHISPER

- An asbestos free cellulosic bound texturing compound containing mineral fillers and exfoliated vermiculite aggregate.
- Oatmeal in colour.
- Tinting to a limited range of colours using powders or liquid paint stainers is possible.
- Withstands polluted air conditions.
- Available with glitter.
- Specified when specific acoustical, fire and thermal insulation properties are required.
- Contains fungicide to retard mould growth.

RECOMMENDED USES:

Apply over lining board or concrete surfaces. Whisper is an ideal finish for plain or decorative ceilings in private homes, schools, libraries, halls, hotels and motels, or in light duty commercial applications. Standard whisper is particularly suitable for use in polluted environments, e.g. clubs and bar ceilings, or where sound absorption and acoustic properties are a requirement.

Not recommended for prolonged exposure to very high humidity.

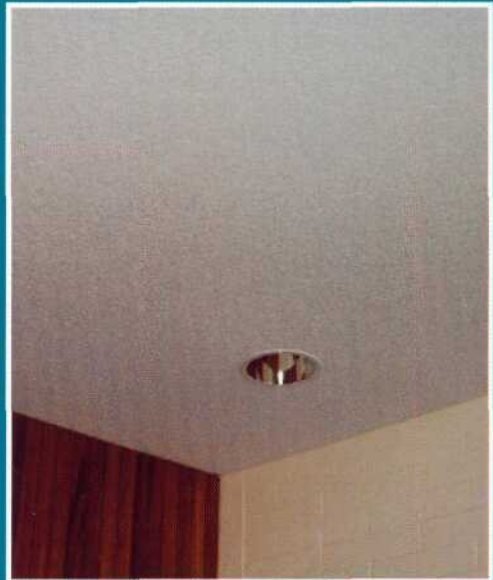

WHITE WHISPER
LDS Church Napier



WHITE WHISPER
Commercial application



NUPLEX
BUILDING
www.nuplexbuilding.co.nz

AUCKLAND

721 Great South Road
Penrose Auckland
New Zealand P.O.Box 12-841
Telephone (09) 579-2029
Fax (09) 525-3709

PALMERSTON NORTH

216 John F Kenedy Drive
Palmerston North
New Zealand P.O.Box 1262
Telephone (06) 353-3685
Fax (06) 353-3632

WELLINGTON

12 School Road
Kaiwharawhara Wellington
New Zealand P.O. Box 4008
Telephone (04) 499-1314
Fax(04)471-5709

CHRISTCHURCH

14 Iverson Terrace
Christchurch
New Zealand P.O. Box 7501
Telephone (03) 366-6802
Fax (03) 365-7845

THE INDUSTRY LEADERS IN
SPECIALIST FINISHES & SYSTEMS SINCE 1956

CERTIFIED ISO 9001

REG NO. 158



ISO9001



MANUAL SECTION	ISSUE DATE	AUTHORISED	REPLACES	PAGE
Ceilings	June 1993		Sept 1990	

WHITE WHISPER

GENERIC TYPE:

Cellulosic bound texturing compound containing mineral fillers and polystyrene aggregate.

TYPICAL PROPERTIES/ FEATURES:

White Whisper is a decorative ceiling texture which incorporates shredded polystyrene as its main aggregate. It is hard and resistant to moderate physical damage.

Factory pre-blended in dry form and packaged in multi-wall paper bags.

Asbestos-free.

Contains fungicide to protect against mould growth.

Finish - fine and coarse textures.

Colour - White only.
May be tinted to pastel colours by incorporating universal paint tinters in the mixing water.

May be pre-mixed with water and stored up to 2 weeks.

Available with glitter.

SUGGESTED USES:

Economic, residential ceiling texture.

Light duty commercial ceilings.

Acoustic control.

...12

No warranty either expressed or implied or statutory is made by NUPLEX in this document except as expressly stated in any sale and purchase agreement entered into between NUPLEX and the buyer.

This document is a technical data information sheet. The description of the product or products and the properties of the product or products contained in this document is for the sole purpose of identifying the product or products and describing their property or properties and does not constitute a warranty that the product or its properties shall conform to that description; nor is the description of the product and/or its properties a warranty by NUPLEX that the goods are suitable for a particular purpose.

NUPLEX CONSTRUCTION PRODUCTS

PO Box 1 2841, Penrose, Auckland Telephone 0-9-579 2029 Fax 0-9-525 3709 www.nuplexbuilding.co.nz email: bpdsales@nuplex.co.nz

H A M I L T O N	PALMERSTON NORTH	W E L L I N G T O N	C H R I S T C H U R C H
Telephone 0-7-847 8658	Telephone 0-6-353 3685	Telephone 0-4-499 1341	Telephone 0-3-366 6802
Fax 0-7-847 3766	Fax 0-6-353 3632	Fax 0-4-471 5709	Fax 0-3-365 7845

WHITE WHISPER (cont'd)

NOTRECOMMENDED:

Application to sheet soft board ceilings without first renailing with galvanised flat head clouts.

Application to soft board tiles.

Polluted atmospheric environments, i.e. bar ceilings.

Prolonged exposure to very high humidity.

APPLICATION METHOD:

Pole gun/Hopper gun

COVERAGE RATE:

Coarse 18m²/bag approx.

Fine 20m²/bag approx.

FILM BUILD:

2-4mm (Nominal thickness).

MIX RATIOS:

18 litres of clean potable water approximately per 20kg bag.

MIXING METHOD:

May be mixed using a power drill mixer or paddle mixer.

DRY TIMES:

Touch dry 8-24 hours.
Thorough dry up to 5 days
(Subject to prevailing conditions)

CLEAN UP:

Clean water.

CAUTION:

Apply appropriate sealer to remove uneven suction and possibility of stain bleed.

Wear protective dust mask when mixing and spraying.

SHELF LIFE:

24 months in original unopened bags stored in a dry place.

PACKAGING:

20 kg multi-wall paper bags.

MANUAL SECTION

ISSUE DATE

AUTHORISED

REPLACES

PAGE

Interior Finishes

June 1995

July 1994

STANDARD WHISPER

GENERIC TYPE:

Cellulosic bound texturing compound containing mineral fillers and exfoliated vermiculite aggregate.

PROPERTIES/FEATURES:

STANDARD WHISPER is a functional, decorative ceiling texture which incorporates exfoliated vermiculite in the texture and filler system.

Asbestos free.

Factory formulated, pre-mixed in dry form and packaged in multi-wall paper bags.

Contains fungicide to protect against mould growth.

Finish - fine and coarse texture.

Colour - Oatmeal

May be tinted to a limited range of pastel colours using powders or liquid Universal paint stainers.

Satin white also available.

Available with or without glitter.

SUGGESTED USES:

Residential and commercial ceilings.

Decorative ceilings.

Especially recommended where excellent fire resistance, condensation and acoustic control is required.

Verandahs and soffits (protected underside only).

Polluted atmospheric environments, e.g. club and bar ceilings.

No warranty either expressed or implied or statutory is made by NUPLEX in this document except as expressly stated in any sale and purchase agreement entered into between NUPLEX and the buyer.

This document is a technical data information sheet. The description of the product or products and the properties of the product or products contained in this document is for the sole purpose of identifying the product or products and describing their property or properties and does not constitute a warranty that the product or its properties shall conform to that description; nor is the description of the product and/or its properties a warranty by NUPLEX that the goods are suitable for a particular purpose.

NUPLEX CONSTRUCTION PRODUCTS

POBox 12841, Penrose, Auckland Telephone 0-9-579 2029 Fax 0-9-525 3709 www.nuplexbuilding.co.nz email: bpdsales@nuplex.co.nz

H A M I L T O N	P A L M E R S T O N N O R T H	W E L L I N G T O N	C H R I S T C H U R C H
Telephone 0-7-847 8658	Telephone 0-6-353 3685	Telephone 0-4-499 1341	Telephone 0-3-366 6802
Fax 0-7-847 3766	Fax 0-6-353 3632	Fax 0-4-471 5709	Fax 0-3-365 7845

STANDARD WHISPER (cont'd)

<u>NOT RECOMMENDED:</u>	Application to sheet or tile soft board ceilings. Surfaces exposed to handling or abrasion.
<u>APPLICATION METHOD:</u>	Mono pump, hopper gun, pressure pot.
<u>COVERAGE RATE:</u>	Decorative 15-18m /15kg bag 3-4mm.
<u>FILM BUILD:</u>	Acoustic and Condensation Control Minimum 7-10m /bag @ 6mm.
<u>NO. OF COATS</u>	Thickness greater than 6mm will require two or more applications (max. 6mm per application). Sufficient dry time will be required between coats to avoid mud cracking.
<u>MIX RATIOS:</u>	30 litres clean potable water/15 kg bag approximately.
<u>MIXING METHOD:</u>	Correct mixing procedure is very important. Mix to a paste for 5 minutes before final let down with remainder of water to spraying consistency.
<u>DRY TIMES:</u>	5-7 days dependant on film build, prevailing weather and adequate ventilation.
<u>CLEAN UP:</u>	Clean water.
<u>CAUTION:</u>	Apply appropriate sealer to remove uneven suction and possibility of stain bleed. Wear protective dust mask when mixing or spraying.
<u>SHELF LIFE/STORAGE:</u>	24 hours in original unopened bags stored in a dry place. Do not crush.
<u>PACKAGING:</u>	15kg multi-wall paper bags.